


- Low Loss Microwave Interconnect
- Wireless Base Station Interconnect

Features & Benefits

- Lower Loss than M17/RG Versions
- Superior Shielding Effectiveness
- Stable Loss & VSWR vs Flexing
- Readily Available RG Type Connectors

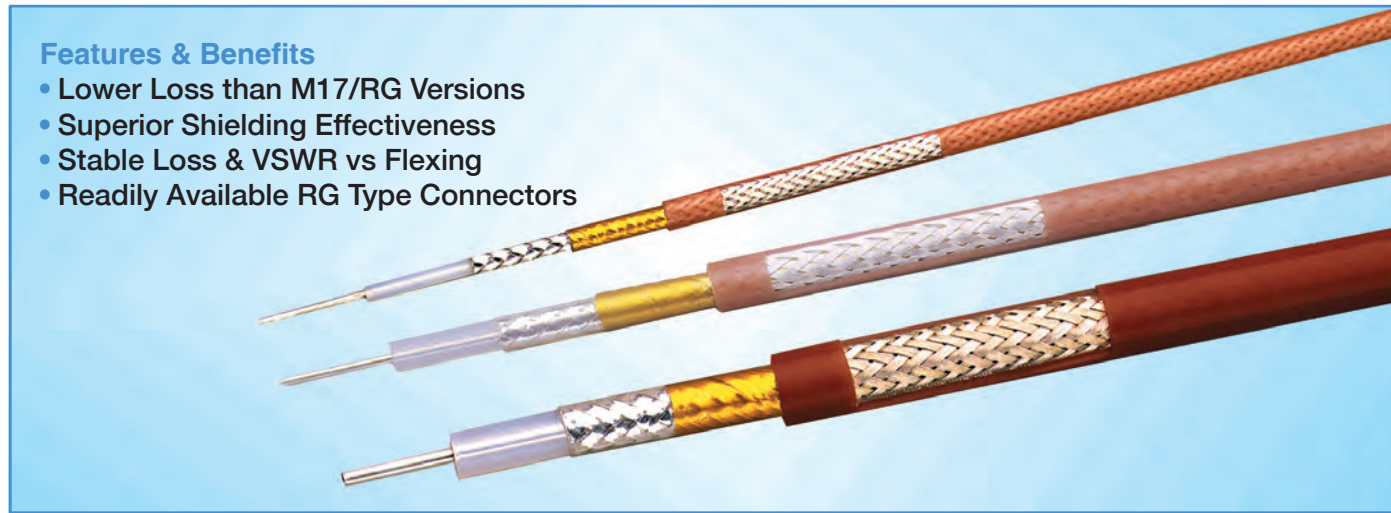

StripFlex cables are identical in materials and construction to their M17/RG predecessors, with the exception of the outer conductor.

The StripFlex shielding system, pioneered by Times Microwave Systems in the mid-sixties, consists of an inner silver plated flat ribbon braid (FSC), a spirally applied and overlapped composite aluminum tape interlayer (Intl), and an overall silver plated round wire braid (SC). The StripFlex shield affords approximately 15% lower loss and >95 dB shielding compared with the typical M17/RG round wire braided shield (40 to 60 dB).

Standard M17/RG cables are shielded with high coverage single or double round wire braids. While these shields provide 40 dB and 60 dB shielding effectiveness respectively, they are not particularly

stable (loss & vswr) nor is the shielding adequate for today's sensitive wireless communications and microwave military/defense applications.

VSWR is lower since the flat ribbons can be applied over the dielectric much more uniformly than multi-end round wire braids. The VSWR and attenuation variation due to aging and flexure is substantially lower at all frequencies, and especially above 12 GHz. StripFlex cables are also available from Times that have been sweep tested for broadband VSWR and attenuation performance. Please contact the factory with your specific requirements.

Standard inexpensive connectors (crimp or clamp style) commonly used on the M17/RG counterparts can be used on StripFlex.

StripFlex Low Loss High Performance Coaxial Cables

TMS Number	Conductor inches (mm)	Dielectric inches (mm)	Shields inches (mm)	Jacket inches (mm)	Weight lbs/foot (kg/m)	Impedance ohms Vp(%)	Capacitance pF/foot (pF/m)	DC Resistance ohms/1kft (/km)	Oper. Voltage F (C)	Temp. Range in (mm)	Min. Bend Radius	Test Freq.
SF-316	SCCS 7/.0067"	PTFE	FSC	FEP-IX	0.013	50 +/- 1	29.4	83.3	4.4	1.2	-67 +392	0.5
	0.0201 (0.51)	0.060 (1.52)	Intl: SC 0.093 (2.36)	0.110 (2.79)	(0.019)	69.5	(96.5)	(273.3)	(14.4)		(-55 +200)	(12.7)
SF-142	SCCS	PTFE	FSC	FEP-IX	0.043	50 +/- 1	29.4	19.1	2.9	1.9	-67 +392	1
	0.037 (0.94)	0.116 (2.95)	Intl: SC 0.154 (3.91)	0.195 (4.95)	(0.064)	69.5	(96.5)	(62.7)	(9.4)		(-55 +200)	(25.4)
SF-304	SCCS	PTFE	FSC	FEP-IX	0.105	50 +/- 1	29.4	7.5	1.7	3.0	-67 +392	1.5
	0.059 (1.50)	0.185 (4.70)	Intl: SC 0.231 (5.87)	0.290 (7.37)	(0.1564)	69.5	(96.5)	(24.6)	(5.4)		(-55 +200)	(38.1)
SF-214	SC 7/.0296"	PE	FSC	PVC-IIA	0.116	50 +/- 1	30.8	1.71	1.36	5.0	-40 +176	2
	0.0888 (2.26)	0.285 (7.24)	Intl: SC 0.330 (8.38)	0.425 (10.8)	(0.173)	65.9	(101)	(5.6)	(4.5)		(-40 +80)	(50.8)
SF-393	SC 7/.0312"	PTFE	FSC:	FEP-IX	0.188	50 +/- 1	29.4	1.54	1.08	5.0	-67 +392	2
	0.094 (2.39)	0.285 (7.24)	Intl: SC 0.330 (8.38)	0.390 (9.91)	(0.280)	69.5	(96.5)	(5.1)	(3.5)		(-55 +200)	(50.8)

- Low Passive Intermod
- High Temperature /Low Temperature
- High Power

